




# BEARING DRIVESHAFT, INC.

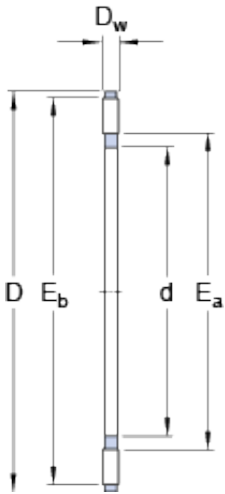

axk 4060 Bearing 2D drawings and 3D CAD models

## skf axk 4060 bearing

Bearing No. axk 4060

Size	60x40x3 mm
Bore Diameter	60 mm
Outer Diameter	40 mm
Width	3 mm
d	40 mm
D	60 mm
D <sub>w</sub>	3 mm
E <sub>a</sub> - min.	45 mm
E <sub>b</sub> - max.	58 mm
Basic dynamic load rating - C	25 kN
Basic static load rating - C <sub>0</sub>	114 kN
Fatigue load limit - P <sub>u</sub>	13.7 kN
Reference speed	2800 r/min
Limiting speed	5600 r/min
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.018
EAN	7316577296887
Product Group	B04144
bore diameter:	40 mm
dynamic load capacity:	25 kN
outside diameter:	60 mm
cage material:	Steel



## BEARING DRIVESHAFT, INC.

bearing width:	3 mm
maximum rpm:	5600 rpm
thrust bearing type:	Roller & Cage Assembly
compatible washer:	AS 4060, GS 81108, LS 4060, WS 81108
operating temperature range:	Max +250 ° F
series:	AXK
bearing material:	Steel
manufacturer product page:	<a href="#">Click here</a>
static load capacity:	114 kN
manufacturer upc number:	7316577296887
$D_w$	3 mm
$E_a$ min.	45 mm
$E_b$ max.	58 mm
Basic dynamic load rating C	25 kN
Basic static load rating $C_0$	114 kN
Fatigue load limit $P_u$	13.7 kN
Mass roller and cage thrust assembly	0.016 kg