




BEARING DRIVESHAFT, INC.

20 mm x 37 mm x 9 mm ntn 6904 bearing

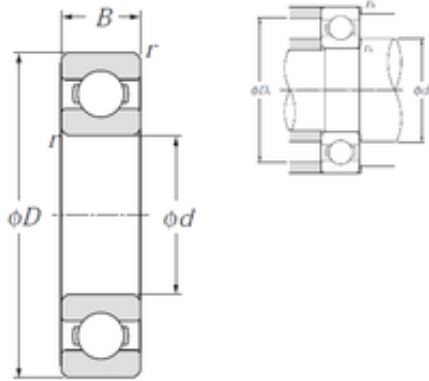

Bearing No. 6904

Size	20x37x9 mm
Bore Diameter	20 mm
Outer Diameter	37 mm
Width	9 mm
d	20 mm
D	37 mm
B	9 mm
C	9 mm
r min.	0,3 mm
da min.	22 mm
da max	24 mm
Da max.	35 mm
ra max.	0,3 mm
Weight	0,036 Kg
Basic dynamic load rating (C)	6,4 kN
Basic static load rating (C0)	3,7 kN
(Grease) Lubrication Speed	19 000 r/min
(Oil) Lubrication Speed	23 000 r/min
rs min	0.3 mm
Radial clearance class	CN
Mass	0.02 kg
Dynamic load, C	6.4 kN
Static load, C0	3.7 kN
Fatigue limit load, Cu	0.17 kN
f0	14.7
Nlim (oil)	23,000 rpm

6904 Bearing 2D drawings and 3D CAD models



BEARING DRIVESHAFT, INC.

Nlim (grease)	19,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.82 Hz
Characteristic outer ring frequency, BPF0	4.58 Hz
Characteristic inner ring frequency, BRF1	6.42 Hz
da min	22 mm
Da max	35 mm
ra max	0.3 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.03
EAN	4547359006636
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 37MM



BEARING DRIVESHAFT, INC.

	Outside Diameter; 9MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6904
Weight / LBS	0.067
Outside Diameter	1.457 Inch 37 Millimeter
Bore	0.787 Inch 20 Millimeter
Outer Race Width	0.354 Inch 9 Millimeter
bore diameter:	20 mm
finish/coating:	Uncoated
outside diameter:	37 mm
bearing material:	High Carbon Chrome Steel
overall width:	9 mm
cage material:	Steel
bore type:	Round
inner ring width:	9 mm
closure type:	Open
outer ring width:	9 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	19000 rpm
snap ring included:	Without Snap Ring
maximum rpm (oil):	23000 rpm
internal clearance:	CN
fillet radius:	0.3 mm



BEARING DRIVESHAFT, INC.

operating temperature range:	-40 to 120 ° C
maximum rpm:	23000 RPM
dynamic load capacity:	6400 N
series:	69
static load capacity:	3700 N
manufacturer product page:	Click here
precision rating:	Class 0